TAIDEN®

Economical Digital Conference System



System features

- Economical and practical, designed for small and medium-sized conference room
- Fully digital audio technology
- Main unit with USB interface and SD card slot for conference audio recording and playback
- USB_H interface for system upgrading
- USB_D interface for lossless recording or input of streaming audio from PC
- With Web page control function, main unit can be controlled through Web page
- Gain and low-cut of each microphone can be adjusted separately

 Conference main unit, with built-in monitor loudspeaker, can be directly employed in small and medium-sized meeting rooms without amplification system

• Low power consumption

"Daisy Chain" topology



Easy to operate with ergonomically designed buttons and two-color indicative ring. Chairman unit is equipped with Priority and Next buttons Uni-directional electret condenser microphone with two-color illuminated ring

Conference unit

HCS-3938 series conference unit is refined, elegant and ergonomically designed. It can fit into any conference place while ensuring perfect acoustic performance. Conference units of the series come in two versions: chairman unit and delegate unit, featuring built-in loudspeaker, volume button and headphone jack. Fixed and removable stem microphones of different lengths are also available.

Four color options

Champagne panel + White buttons
Champagne panel + Champagne buttons
Charcoal gray panel + Green buttons
Charcoal gray panel + Charcoal gray buttons



Conference main unit

HCS-3900M conference main unit is the heart of the whole conference system, and meeting can be managed easily with its five operation modes. To each main unit, a total of 50 conference units can be connected, while the figure can be increased to 255 by adding HCS-3900ME extension unit.


No.	Conference main unit		
Function	HCS-3900MA/20	HCS-3900MB/20	HCS-3900ME
Speech	•	•	
Audio Recording	•		
256×64 OLED	•	•	
Trunk-line cable outlet	2	2	3

With the built-in monitor loudspeaker, the main unit can be directly employed in small and medium-sized meetingrooms without amplification system






USB interface and SD card slot are equipped on main unit for conference audio recording and playback. The recording will switch to the other device when SD card or USB stick is full without interruption.



Web Control

The user can access the IP address of main unit from web browser to handle meeting management, e.g. conference unit management, speaking and request list management, CMU setting, video matrix control, predefined position setting.

www.taiden.com

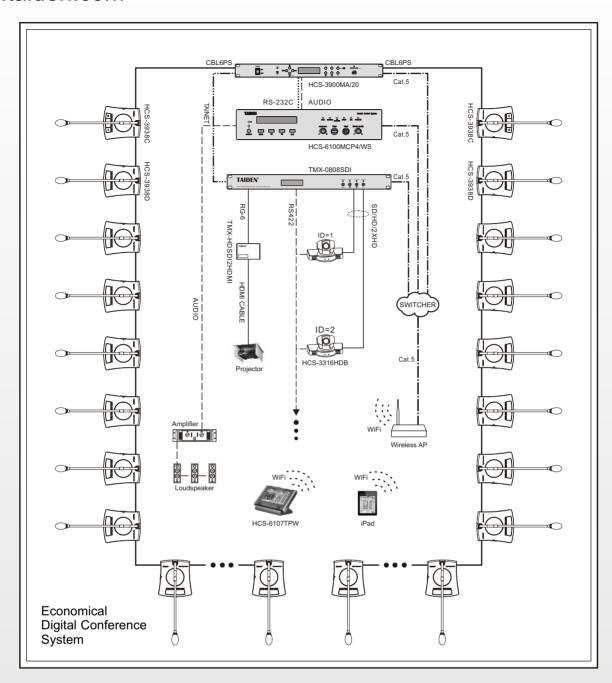









Distributed by:



Member of International Congress & Convention Association (ICCA)

Printed in Shenzhen® TAIDEN

Modifications reserved